

## Ferrite core for line filters, and method for producing the same

**Publication number:** EP0797222

**Publication date:** 1997-09-24

**Inventor:** INOUE SHOJI (JP)

**Applicant:** TDK CORP (JP)

**Classification:**

**- International:** C04B35/26; H01F1/34; C04B35/26; H01F1/12; (IPC1-7): H01F17/04; C04B35/26; H01F1/34; H01F17/06

**- European:** C04B35/26H; H01F1/34B2

**Application number:** EP19970301999 19970324

**Priority number(s):** JP19960093206 19960322

**Also published as:**



US5779930 (A1)

EP0797222 (B1)

**Cited documents:**



EP0628524

EP0551907

XP000443737

JP5074623


JP3041708

**Report a data error here**

### Abstract of EP0797222

A ferrite core for line filters according to the invention comprises, as main components, manganese oxide in an amount of 13.5 to 16% by weight calculated as MnO and zinc oxide in an amount of 14 to 16% by weight calculated as ZnO with the rest being iron oxide, and as subordinate components, silicon oxide in an amount of 50 to 200 ppm calculated as SiO<sub>2</sub>, calcium oxide in an amount of 100 to 350 ppm calculated as CaO, niobium oxide in an amount of 30 to 150 ppm calculated as Nb<sub>2</sub>O<sub>5</sub>, molybdenum oxide in an amount of 20 to 300 ppm calculated as MoO<sub>3</sub>, and bismuth oxide in an amount of 100 to 800 ppm calculated as Bi<sub>2</sub>O<sub>3</sub>. Such a core has high inductance at about 1 kHz and high impedance at about 500 kHz, and shows a high noise reduction coefficient over a wide frequency band.

Data supplied from the *esp@cenet* database - Worldwide



(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 797 222 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**24.09.1997 Bulletin 1997/39**

(51) Int Cl.<sup>6</sup>: **H01F 17/04, H01F 17/06,  
H01F 1/34, C04B 35/26**

(21) Application number: **97301999.5**

(22) Date of filing: **24.03.1997**

(84) Designated Contracting States:  
**DE FR GB**

(72) Inventor: **Inoue, Shoji**  
**Chuo-ku, Tokyo (JP)**

(30) Priority: **22.03.1996 JP 93206/96**

(74) Representative: **Adams, William Gordon et al**  
**RAWORTH, MOSS & COOK**  
**36 Sydenham Road**  
**Croydon Surrey CR0 2EF (GB)**

(71) Applicant: **TDK Corporation**  
**Chuo-ku, Tokyo (JP)**

**(54) Ferrite core for line filters, and method for producing the same**

(57) A ferrite core for line filters according to the invention comprises, as main components, manganese oxide in an amount of 13.5 to 16% by weight calculated as MnO and zinc oxide in an amount of 14 to 16% by weight calculated as ZnO with the rest being iron oxide, and as subordinate components, silicon oxide in an amount of 50 to 200 ppm calculated as SiO<sub>2</sub>, calcium

oxide in an amount of 100 to 350 ppm calculated as CaO, niobium oxide in an amount of 30 to 150 ppm calculated as Nb<sub>2</sub>O<sub>5</sub>, molybdenum oxide in an amount of 20 to 300 ppm calculated as MoO<sub>3</sub>, and bismuth oxide in an amount of 100 to 800 ppm calculated as Bi<sub>2</sub>O<sub>3</sub>. Such a core has high inductance at about 1 kHz and high impedance at about 500 kHz, and shows a high noise reduction coefficient over a wide frequency band.

**EP 0 797 222 A1**

## Description

## FIELD OF THE INVENTION

5 The present invention relates to a ferrite core for line filters which has high permeability with an improvement in its frequency dependence, and a high noise reduction coefficient over a wide frequency band.

## BACKGROUND OF THE INVENTION

10 Ferrite cores for line filters are required to have high permeability at a relatively high frequency as well as over a wide frequency band (of about 0.5 to about 1,000 kHz). A typical manganese-zinc system ferrite having high permeability over such a wide frequency band is disclosed in JP-A-6-204025 (which teaches the addition of bismuth and molybdenum, and shows an initial permeability of at least 9,000 at 100 kHz, and at least 3,000 at 500 kHz). JP-A-5-74623, too, discloses a high-permeability manganese-zinc system ferrite (with molybdenum added thereto).

15 The ferrite cores for line filters are required to have, in addition to permeability, high inductance in a low frequency region, e.g., at 1 kHz, and high impedance in a high frequency region, e.g., at 500 kHz. With conventional high-permeability materials, however, it is impossible to make any reasonable compromise between both requirements.

Referring then to the manganese-zinc system ferrite core with molybdenum added thereto, the proportion of molybdenum to be incorporated in the starting feed need be higher than designed, because of the necessity of taking account of the amount of sublimable or evaporable molybdenum which will be lost especially upon fired. However, actual mass production of cores with an excessive amount of molybdenum added thereto has revealed that there are significant performance differences between individual cores; that is, low- and high-permeability cores are produced in a mixed up state.

20 To prevent degradation of magnetic properties due to the evaporation of zinc, it has been proposed to use a case having the same composition as that of a fired compact or co-fire a compacted form of zinc oxide, as typically set forth in JP-A-3-41708. However, such methods cost much.

## DISCLOSURE OF THE INVENTION

30 An object of the present invention is to provide a ferrite core for line filters which has high permeability with an improvement in its frequency dependence, high inductance in low frequency regions, and high impedance in high frequency regions, so that high noise reduction are achievable with little, if any, performance variation.

This and other objects are achieved by the present invention which is defined below as (1) to (7).

35 (1) A ferrite core for line filters, which comprises

manganese oxide, zinc oxide, and iron oxide as main components, and silicon oxide, calcium oxide, niobium oxide, molybdenum oxide, and bismuth oxide as subordinate components, and in which

40 in the main components, a content of manganese oxide is 13.5 to 16% by weight, and a content of zinc oxide is 14 to 16% by weight with the rest being iron oxide, and

a weight proportion of the subordinate components based on the main components is such that

silicon oxide is 50 to 200 ppm calculated as  $\text{SiO}_2$ ,

calcium oxide is 100 to 350 ppm calculated as  $\text{CaO}$ ,

45 niobium oxide is 30 to 150 ppm calculated as  $\text{Nb}_2\text{O}_5$ ,

molybdenum oxide is 20 to 200 ppm calculated as  $\text{MoO}_3$ , and

bismuth oxide is 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ .

(2) The ferrite core of (1), wherein a ratio of  $\text{CaO}$  to  $\text{MoO}_3$  is 0.5 to 15.

50 (3) The ferrite core of (2), wherein the ratio of  $\text{CaO}$  to  $\text{MoO}_3$  is 3 to 8.

(4) The ferrite core of any one of (1) to (3), which is obtained by compacting, and firing a mixture of a main component feed with a subordinate component feed, and in which

the main component feed comprises a manganese oxide material in an amount of 10 to 20% by weight calculated as  $\text{MnO}$ , and a zinc oxide material in an amount of 10 to 20% by weight calculated as  $\text{ZnO}$  with the rest being an iron oxide material,

55 the subordinate component feed comprises, based on the main component feed, a silicon oxide material in an amount of 50 to 200 ppm calculated as  $\text{SiO}_2$ , a calcium oxide material in an amount of 100 to 350 ppm

calculated as  $\text{CaO}$ , a niobium oxide material in an amount of 50 to 250 ppm calculated as  $\text{Nb}_2\text{O}_5$ , a molybdenum oxide material in an amount of 100 to 400 ppm calculated as  $\text{MoO}_3$ , and a bismuth oxide material in an amount of 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ , and a ratio of  $\text{CaO}$  to  $\text{MoO}_3$  in the subordinate component feed is 0.6 to 1.6.

(5) A ferrite core for line filters of any one of (1) to (3), which is obtained by compacting, and firing a mixture of the main component feed with the subordinate component feed, and in which

the subordinate component feed comprises, based on the main component feed, a silicon oxide material in an amount of 50 to 200 ppm calculated as  $\text{SiO}_2$ , a calcium oxide material in an amount of 100 to 350 ppm calculated as  $\text{CaO}$ , a niobium oxide material in an amount of 50 to 250 ppm calculated as  $\text{Nb}_2\text{O}_5$ , a molybdenum oxide material in an amount of 100 to 400 ppm calculated as  $\text{MoO}_3$ , and a bismuth oxide material in an amount of 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ , and a ratio of  $\text{CaO}$  to  $\text{MoO}_3$  in the subordinate component feed is 0.6 to 1.6.

(6) The ferrite core of any one of (1) to (5), which has permeability of at least 10,000 at 100 kHz, and at least 3,000 at 500 kHz.

(7) A method for producing the ferrite core for line filters of any one of (1) to (6), in which a plurality of compacts are placed on a setter, and then fired.

#### EFFECT AND ADVANTAGES OF THE INVENTION

The ferrite core for line filters according to the present invention, because of containing as additives predetermined amounts of silicon oxide, calcium oxide, niobium oxide, molybdenum oxide, and bismuth oxide, has high permeability with an improvement in its frequency dependence especially at frequencies of 100 to 500 kHz, and exhibits high impedance at frequencies of 100 to 500 kHz and high inductance at 0.5 to 100 kHz. When applied to line filters operating at frequencies of about 0.5 to about 1,000 kHz, therefore, the ferrite core of the invention shows good-enough noise reduction performance, and can be reduced in terms of size and the number of turns.

Furthermore, the present invention enables ferrite cores to be mass-produced while their characteristic variations, especially their variations in permeability and its frequency dependence can be reduced.

Manganese-zinc ferrite cores may be mass-produced by firing a number of compacts placed on a setter in a pusher furnace. At this time, the cores vary in characteristics depending on where on the setter the compacts are positioned. This characteristic difference is attributable to core composition, especially the content of molybdenum. More specifically, in some compacts positioned in the vicinity of the center of a compact group placed on one setter the amount of sublimation or evaporation of molybdenum is small, while in some compacts positioned on or around the surface of the compact group the amount of sublimation or evaporation of molybdenum becomes large. This result is reflected on the core composition.

Based on such findings, the inventors have carried out experiments over and over. As a result, the inventors have found that the amount of sublimation or evaporation of molybdenum correlates with the amount of calcium in a compact; that is, the sublimation or evaporation of molybdenum is minimized by limiting the ratio of the amount of calcium to the amount of molybdenum in a starting feed to a specific range, so that the amount of molybdenum can be kept in a specific range, thereby improving noise reduction performance over a wide frequency band. This in turn makes it possible to minimize the sublimation or evaporation of molybdenum in compacts positioned on or around the surface of a compact group on the setter, thereby minimizing characteristic variations due to where on the setter the compacts are located, especially variations in permeability and its frequency dependence. According to the present invention capable of minimizing the sublimation or evaporation of molybdenum, it is also possible to prevent a compositional variation of one core between the vicinity of its center and the vicinity of its surface.

Since the temperature at which  $\text{MoO}_3$  has a vapor pressure of 0.1 atm. is as low as about 1,200°C, it appears that the amount of  $\text{MoO}_3$  sublimed or evaporated during ferrite firing becomes large. From this, it is believed that even with compounds other than molybdenum oxide and having a high vapor pressure at or around the firing temperature for ferrite, characteristic variations can again be minimized by control of the ratio of the amount of calcium oxide to their amount, as is the case with molybdenum oxide.

The examples of JP-A-6-204025, mentioned above, teach the addition of  $\text{SiO}_2$ ,  $\text{CaO}$ ,  $\text{Bi}_2\text{O}_3$  and  $\text{MoO}_3$ , but make no reference to the addition of  $\text{Nb}_2\text{O}_5$ . Nor is the ratio of  $\text{CaO}$  to  $\text{MoO}_3$  referred to therein. According to the teachings of this publication, it is thus impossible to achieve stable provision of invariable ferrite cores which have high permeability with an improvement in its frequency dependence, high inductance at low frequencies, and high impedance at high frequencies.

## BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a schematic showing one exemplary core shape for measuring impedance, and inductance.

## BEST MODE FOR CARRYING THE INVENTION INTO EFFECT

Illustrative constructions of the present invention will now be explained at great length.

The ferrite core for line filters according to the present invention may be produced by compacting, and firing a mixture of a main component feed with a subordinate component feed.

The main component feed used comprises 13.5 to 16% by weight calculated as MnO of a manganese oxide material, and 14 to 16% by weight calculated as ZnO of a zinc oxide material, with the rest being an iron oxide material. When the composition of the main component feed departs from the range mentioned above, no high permeability is achievable.

For the main component feed use may be made of ordinary iron oxide materials, manganese oxide materials, and zinc oxide materials, i.e., oxides, and compounds converted by firing to oxides.

The subordinate component feed contains a silicon oxide material, a calcium oxide material, a niobium oxide material, a molybdenum oxide material, and a bismuth oxide material. For these materials use may be made of oxides of the respective metals, or compounds of the respective metals which are converted by firing to oxides. However, it is preferable to use  $\text{SiO}_2$  as the silicon oxide material,  $\text{CaCO}_3$  as the calcium oxide material,  $\text{Nb}_2\text{O}_5$  as the niobium oxide material,  $\text{Bi}_2\text{O}_3$  as the bismuth oxide material, and  $\text{MoO}_3$  as the molybdenum oxide material.

The content of the silicon oxide material is 50 to 200 ppm calculated as  $\text{SiO}_2$ . Too little silicon oxide results in a permeability drop, whereas too much gives rise to abnormal grain growth during firing, resulting again in a permeability drop. In either case, any desired impedance and inductance are not obtainable.

The content of the calcium oxide material is 100 to 350 ppm calculated as CaO. Too little calcium oxide results in a lowering of permeability at a high frequency of about 500 kHz, whereas too much gives rise to a lowering of permeability at an intermediate frequency of about 100 kHz. In either case, any desired impedance and inductance are not obtainable.

The content of the niobium oxide material is 50 to 250 ppm calculated as  $\text{Nb}_2\text{O}_5$ . Too little or too much niobium oxide gives rise to a permeability drop; in either case, any desired impedance and inductance are not obtainable.

The content of the molybdenum oxide material is 100 to 400 ppm calculated as  $\text{MoO}_3$ . Too little molybdenum oxide brings about abnormal grain growth during firing, ending up in a permeability drop, whereas too much leads to an increase in the amount of molybdenum sublimed or evaporated during firing and, hence, a significant characteristic variation between cores obtained by the co-firing of a number of compacts. In either case, any desired impedance and inductance are not obtainable.

The content of the bismuth oxide material is 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ . Too little or too much bismuth oxide results in a permeability drop; in either case, any desired impedance and inductance are not obtainable.

It is here to be noted that the contents of the subordinate component materials are given in ppm unit with respect to the main component feed.

The ratio of calcium oxide to molybdenum oxide in the subordinate component feed is 0.6 to 1.6, and preferably 0.7 to 1.5, calculated as  $\text{CaO}/\text{MoO}_3$ . At too low a ratio, the amount of molybdenum sublimed or evaporated during firing increases, resulting in a significant characteristic variation between cores obtained by the co-firing of a number of compacts, especially a significant variation in permeability, and its frequency dependence. Too high a ratio, on the other hand, gives rise to a permeability drop at a low frequency of about 100 kHz. In either case, any desired impedance and inductance are not obtainable.

It is here to be understood that the ferrite core of the present invention may contain, in addition to the aforesaid subordinate components, at least one member of oxides such as indium oxide, vanadium oxide, and tantalum oxide. Preferably in this case, these oxides are present in a total amount of 0 to about 3,000 ppm when calculated as  $\text{In}_2\text{O}_3$ ,  $\text{V}_2\text{O}_5$ , and  $\text{Ta}_2\text{O}_5$ , respectively.

First, the aforesaid main component feed is calcined at about 850 to about 950°C for about 5 minutes to 2 hours. The calcination may be carried out by spray calcination. The subordinate component feed is then added to, and mixed with the obtained calcined body by pulverization. Calcium oxide and silicon dioxide or their source compounds may be added to the main component feed before and/or after calcination. The mixture is finally granulated with a small amount, e.g., 0.1 to 1.0% by weight of a suitable binder such as polyvinyl alcohol added thereto, using a spray dryer or the like, thereby obtaining granules of about 80 to about 200  $\mu\text{m}$  in size, which are in turn compacted.

The obtained compact is then fired. For this firing, for instance, the compact is slowly heated to a target sintering temperature at a heating rate of about 50 to 300°C/hour in an atmosphere having a controlled oxygen concentration. Then, sintering is finished by holding the compact at a given temperature of usually at least 1,250°C, especially 1,300 to 1,400°C for about 4 to about 5 hours. After the completion of sintering, the product is preferably cooled down at a

cooling rate of about 50 to about 300°C/hour in an atmosphere with its oxygen concentration placed under control.

When such firing is effected, it is desired that the partial pressure of oxygen be kept at preferably at least 25%, more preferably at least 30%, and most preferably 30 to 100% from at least the heating step of 1,000°C or higher to the temperature holding step, and more preferably in a temperature range of at least 1,000°C. In general, a longer holding period of time may be used at a higher firing temperature so that crystal grains having a relatively large size are obtained to achieve high permeability. However, the higher and longer the firing temperature and time, the shorter the service life of a firing furnace, or the lower the productivity. In a combined bismuth oxide, molybdenum oxide and niobium oxide composition system, however, oxygen firing such as one mentioned above makes it possible to improve permeability at 100 to 500 kHz even when firing occurs at a relatively low temperature for a relatively short time, so that both inductance in a low frequency region and impedance in a high frequency region can be improved. Low-temperature and short-time firing also enables the sublimation or evaporation of molybdenum and bismuth to be so minimized that permeability variations can be much more reduced.

Usually, firing may be carried out in a pusher furnace, which enables continuous firing to be carried out by the continuous introduction therein of setters with a plurality of compacts placed thereon. Setter size is not critical, but is usually about 250 to about 300 mm in length per side. About 50 to about 500 compacts per stage may be placed on one setter, although depending on setter size or compact size. One setter may be made up of 1 to 8 stages, and so may have a total of about 50 to about 2,400 compacts or a total load of about 2 to about 6 kg placed thereon. Even when, according to the present invention, such numerous compacts are placed on the setter for firing purposes, it is possible to minimize compositional variations which may otherwise be caused by position variations of compacts on the setter.

The aforesaid starting feeds usually provide the following (core) composition upon fired. The main component feed contains 13.5 to 16% by weight calculated as MnO of manganese oxide, and 14 to 16% by weight calculated as ZnO of zinc oxide with the rest being iron oxide. The subordinate component feed contains 50 to 200 ppm calculated as SiO<sub>2</sub> of silicon oxide, 100 to 350 ppm calculated as CaO of calcium oxide, 30 to 150 ppm calculated as Nb<sub>2</sub>O<sub>5</sub> of niobium oxide, 20 to 200 ppm, preferably 20 to 100 ppm, calculated as MoO<sub>3</sub> of molybdenum oxide; and 100 to 800 ppm calculated as Bi<sub>2</sub>O<sub>3</sub> of bismuth oxide. Such composition enables both inductance in a low frequency region, e.g., at about 1 kHz and impedance in a high frequency region, e.g., at about 500 kHz to have high values, so that noise reduction can be effectively achieved over a wide frequency band. In some cases, the amount of the subordinate components in the core is larger than that of the subordinate component feed added for the reason that the elements forming the subordinate components, especially Si and Ca have often been contained as impurities in the main component feed. In some cases, on the other hand, the amount of the subordinate components in the core is smaller than that of the subordinate component feed added for the reason that the elements forming the subordinate components, especially Mo and Nb are often lost by sublimation or evaporation during firing.

It is here to be understood that the ratio of CaO/MoO<sub>3</sub> in the core composition is preferably 0.5 to 15, and more especially 3 to 8.

The ferrite core of the present invention has preferably a mean grain size of 5 to 50 μm. Too large or too small a mean grain size causes the high-frequency dependence of μi to drop. It is here to be noted that the mean crystal grain size may be found by etching mirror-polished surfaces of polycrystal samples with an acid, and observing them under an optical microscope to average sample diameters upon calculated as circles.

According to the present invention, ferrite cores may be produced by the co-firing of a multiplicity of compacts placed on the setter as mentioned above. Even in this case, it is easy to achieve an initial permeability of at least 10,000, possibly 11,000 or more or even possibly 12,000 at 100 kHz. It is also easy to achieve an initial permeability of at least 3,000, possibly 3,500 or more at 500 kHz.

#### EXAMPLE

Examples of the present invention are given below by way of illustration.

##### Example 1

A main component feed comprising MnO (14.3% by weight) and ZnO (15.4% by weight) with the rest being Fe<sub>2</sub>O<sub>3</sub> was mixed with a subordinate component feed comprising SiO<sub>2</sub> (50 ppm), Bi<sub>2</sub>O<sub>3</sub> (300 ppm), Nb<sub>2</sub>O<sub>5</sub>, MoO<sub>3</sub> and CaCO<sub>3</sub>. Set out in Table 1 are the amounts of Nb<sub>2</sub>O<sub>5</sub>, MoO<sub>3</sub> and CaCO<sub>3</sub> (calculated as CaO) added as well as the ratios of the amount of CaCO<sub>3</sub> (calculated as CaO) added to the amount of MoO<sub>3</sub> added.

Specifically, the main component materials Mn<sub>3</sub>O<sub>4</sub>, ZnO and Fe<sub>2</sub>O<sub>3</sub> were mixed into a mixture which was then calcined at 900°C for 30 minutes. The subordinate component feed was added to the obtained calcined body at the proportions set out in Table 1, and mixed therewith by pulverization.

This pulverized mixture was added with a binder to a mean particle size of 150 μm by means of a spray dryer, and

## EP 0 797 222 A1

compacted. Then, the compact was heated in an atmosphere having a controlled partial oxygen pressure, and held at 1,350°C for 4 hours for sintering. Thereafter, the sintered compact was cooled in an atmosphere having a controlled partial oxygen pressure to obtain a core sample having such shape as illustrated in Figure 1. Length is given in mm unit. For firing, a pusher furnace was used. Five hundred and forty (540) compacts were loaded per one setter. The loading pattern used was one stage.

Each core sample was measured for its average composition by means of fluorescence x-rays, and for its Si (calculated as  $\text{SiO}_2$ ), Nb (as  $\text{Nb}_2\text{O}_5$ ), Bi (as  $\text{Bi}_2\text{O}_3$ ), Mo (as  $\text{MoO}_3$ ), and Ca (as  $\text{CaO}$ ) contents.

It is here to be noted that the compositional ratio of the main components of the core was equivalent to that of the main component feed.

Each core sample was measured for its inductance  $L$  at 1 kHz and its impedance  $|Z|$  at 500 kHz under the following conditions:

Current: 0.5 mA

Number of turns: 10 turns

Temperature: 23°C

The results are shown in Table 1.

Table 1

Sample No.	Feed Composition					
	SiO <sub>2</sub> (ppm)	Bi <sub>2</sub> O <sub>3</sub> (ppm)	Nb <sub>2</sub> O <sub>5</sub> (ppm)	MoO <sub>3</sub> (ppm)	CaO (ppm)	CaO/MoO <sub>3</sub>
1	30	500	100	300	200	0.67
2	30	400	50	300	200	0.67
3	50	300	100	200	200	1.00
4 (comp.)	50	300	100	200	100	0.5*
5 (comp.)	50	300	100	200	350	1.75*
6 (comp.)	50	300	0*	200	200	1.00
7 (comp.)	50	300	100	200	0*	0*

Table 1 (continued)

Sample No.	Core Composition					1kHz L μm	500kHz Z Rel.**Ω	Rel.**	
	SiO2 (ppm)	Bi2O3 (ppm)	Nb2O5 (ppm)	MoO3 (ppm)	CaO (ppm)				
1	69	287	68	32	190	290	1.36	673	1.54
2	86	320	43	41	204	294	1.37	650	1.48
3	109	243	80	32	176	275	1.29	682	1.56
4 (comp.)	107	246	77	29	68*	279	1.30	485	1.11
5 (comp.)	113	237	85	35	382*	214	1	715	1.63
6 (comp.)	102	240	0*	31	186	220	1.03	452	1.03
7 (comp.)	109	239	74	28	18*	264	1.13	438	1

\* Outside the range of the invention

\*\* Relative value

Si 110-130

Nb 80-120

Bi 250-300

From the results shown in Table 1, it is found that core sample Nos. 1-3 of the present invention show an about 30% increase in inductance at 1 kHz over the lowest level of the comparative samples and an about 50% increase in impedance at 500 kHz over the lowest level of the comparative samples; they have extremely high values for both inductance at 1 kHz and impedance at 500 kHz. However, the samples with neither niobium nor calcium added thereto are very low in both inductance at 1 kHz and impedance at 500 kHz. Sample No. 4 having a lower calcium content shows good inductance at 1 kHz, but has an extremely low impedance at 500 kHz. On the contrary, sample No. 5 having a higher calcium content is improved in terms of impedance at 500 kHz, but has an extremely low inductance



at 1 kHz. Core sample Nos. 1-7 were actually used for common mode choke coils of line filters. As a result, it was found that invented core sample Nos. 1-3 have much higher effect on noise reductions at 0.5 to 1,000 kHz, as compared with comparative core sample Nos. 4-7.

## 5 Example 2

A main component feed comprising MnO (14.3% by weight) and ZnO (15.4% by weight) with the rest being Fe<sub>2</sub>O<sub>3</sub> was mixed with a subordinate component feed comprising SiO<sub>2</sub> (50 ppm), Bi<sub>2</sub>O<sub>3</sub> (300 ppm), Nb<sub>2</sub>O<sub>5</sub>, MoO<sub>3</sub> and CaCO<sub>3</sub>. Set out in Table 2 are the amounts of Nb<sub>2</sub>O<sub>5</sub>, MoO<sub>3</sub> and CaCO<sub>3</sub> (calculated as CaO) added as well as the ratios of the amount of CaCO<sub>3</sub> (calculated as CaO) added to the amount of MoO<sub>3</sub> added.

Specifically, the main component materials Mn<sub>3</sub>O<sub>4</sub>, ZnO and Fe<sub>2</sub>O<sub>3</sub> were mixed into a mixture which was then calcined at 900°C for 30 minutes. The subordinate component feed was added to the obtained calcined body at the proportions set out in Table 2, and mixed therewith by pulverization.

This pulverized mixture was added with a binder to a mean particle size of 150 μm by means of a spray dryer, and compacted. Then, the compact was heated in an atmosphere having a controlled partial oxygen pressure, and held at 1,350°C for 4 hours for sintering. Thereafter, the sintered compact was cooled in an atmosphere having a controlled partial oxygen pressure to obtain a toroidal core sample of 31 mm in outer diameter, 19 mm in inner diameter and 8 mm in height. For firing, a pusher furnace was used. Three hundred and forty-three (343) compacts were loaded per one setter. The loading pattern used was seven stages each having 7 x 7 compacts loaded thereon.

The composition of each core sample was measured by means of fluorescence x-rays. Inner, and outer cores were measured for their molybdenum (calculated as MoO<sub>3</sub>), and calcium (as CaO) contents, respectively. The ratio of the molybdenum content of the inner cores to that of the outer cores was calculated as well. These results are shown in Table 2 in which the "inner core" refers to cores corresponding to compacts located at a central region of a compact group placed on the setter, and the "outer core" to cores corresponding to compacts located on the outermost side of the compact group.

It is here to be noted that the compositional ratio of the main components of each core was equivalent to that of the main component feed with a silicon content of 100 to 130 ppm calculated as SiO<sub>2</sub>, a niobium content of 80 to 120 ppm calculated as Nb<sub>2</sub>O<sub>5</sub>, and a bismuth content of 250 to 300 ppm calculated as Bi<sub>2</sub>O<sub>3</sub>.

Each core sample was measured for its initial permeability μi at 100 kHz and 500 kHz (both at 25°C). The results are shown in Table 2. Values of the "outer-inner" in Table 2 were obtained by

$$100 \times \{(\mu_i \text{ of outer core}) - (\mu_i \text{ of inner core})\} / \mu_i \text{ of inner core}$$

The initial permeability was measured using an LCR meter.

Table 2

Sample No.	Feed Composition			Core Composition			Quant. Ratio of MoO <sub>3</sub>
	Nb <sub>2</sub> O <sub>5</sub> (ppm)	MoO <sub>3</sub> (ppm)	CaO (ppm)	MoO <sub>3</sub> (ppm)	CaO (ppm)	MoO <sub>3</sub> (ppm)	
1 (comp.)	100	200	0*	129	70*	37	68*
2 (comp.)	100	200	75*	155	122	60	119
3 (comp.)	100	200	100	158	147	73	139
4	100	200	150	160	188	102	184
5	100	200	200	192	239	129	236
6 (comp.)	0*	200	200	190	235	130	233
7 (comp.)	100	200	350	194	386*	163	381*
8	100	150	150	138	186	100	181
9	100	150	200	128	232	103	234

Table 2 (continued)

Sample No.	$\mu$ i at 100 kHz		$\mu$ i at 500 kHz	
	Inner core	Outer core	Inner core	Outer core
1 (comp.)	8210	8500	3.5%	2100
2 (comp.)	8570	10470	22.2%	2520
3 (comp.)	8940	11170	26.2%	2590
4	10440	11180	7.1%	3160
5	10610	10810	1.9%	3400
6 (comp.)	8920	9800	9.9%	2300
7 (comp.)	9830	9540	-3.0%	4310
8	10740	10910	1.6%	3340
9	10590	10420	-1.6%	3750

\* Outside of the range of the invention

The results shown in Table 2 clarify the effect of the present invention, i.e., the effect resulting from the limitation of CaO/MoO<sub>3</sub> in the subordinate component feed to a specific range. In other words, the core samples of the present invention, which contains Nb<sub>2</sub>O<sub>5</sub> in the predetermined amount with the CaO/MoO<sub>3</sub> ratio lying within the predetermined range, show high  $\mu$ i at both 100 kHz and 500 kHz, with a small  $\mu$ i difference between the inner and outer cores.

In core samples Nos. 2 and 3 having too small a CaO/MoO<sub>3</sub> ratio, however, there is a large  $\mu$ i difference between the inner and outer cores. In core sample No. 1 with no calcium added thereto, there is a relatively small  $\mu$ i difference between the inner and outer cores because of a considerable decrease in the amount of MoO<sub>3</sub> due to firing. However,

the initial permeability  $\mu_i$  itself drops remarkably. In core sample No. 7 having too large a  $\text{CaO}/\text{MoO}_3$  ratio, there is a drop of permeability at 100 kHz, and in core sample No. 6 with no  $\text{Nb}_2\text{O}_5$  added thereto, the initial permeability  $\mu_i$  is low with a large  $\mu_i$  difference between the inner and outer cores.

Furthermore in the core samples of the present invention, a compositional difference per core between the vicinity of the surface and the vicinity of the center is small.

The effect of the present invention is evident from the results of the foregoing examples.

## Claims

1. A ferrite core for line filters, which comprises

manganese oxide, zinc oxide, and iron oxide as main components, and silicon oxide, calcium oxide, niobium oxide, molybdenum oxide, and bismuth oxide as subordinate components, and in which

in the main components, a content of manganese oxide is 13.5 to 16% by weight, and a content of zinc oxide is 14 to 16% by weight with the rest being iron oxide, and

a weight proportion of the subordinate components based on the main components is such that

silicon oxide is 50 to 200 ppm calculated as  $\text{SiO}_2$ ,  
calcium oxide is 100 to 350 ppm calculated as  $\text{CaO}$ ,  
niobium oxide is 30 to 150 ppm calculated as  $\text{Nb}_2\text{O}_5$ ,  
molybdenum oxide is 20 to 200 ppm calculated as  $\text{MoO}_3$ , and  
bismuth oxide is 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ .

2. The ferrite core of claim 1, wherein a ratio of  $\text{CaO}$  to  $\text{MoO}_3$  is 0.5 to 15.

3. The ferrite core of claim 2, wherein the ratio of  $\text{CaO}$  to  $\text{MoO}_3$  is 3 to 8.

4. The ferrite core of any one of claims 1 to 3, which is obtained by compacting, and firing a mixture of a main component feed with a subordinate component feed, and in which

the main component feed comprises a manganese oxide material in an amount of 10 to 20% by weight calculated as  $\text{MnO}$ , and a zinc oxide material in an amount of 10 to 20% by weight calculated as  $\text{ZnO}$  with the rest being an iron oxide material,

the subordinate component feed comprises, based on the main component feed, a silicon oxide material in an amount of 50 to 200 ppm calculated as  $\text{SiO}_2$ , a calcium oxide material in an amount of 100 to 350 ppm calculated as  $\text{CaO}$ , a niobium oxide material in an amount of 50 to 250 ppm calculated as  $\text{Nb}_2\text{O}_5$ , a molybdenum oxide material in an amount of 100 to 400 ppm calculated as  $\text{MoO}_3$ , and a bismuth oxide material in an amount of 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ , and  
a ratio of  $\text{CaO}$  to  $\text{MoO}_3$  in the subordinate component feed is 0.6 to 1.6.

5. A ferrite core for line filters of any one of claims 1 to 3, which is obtained by compacting, and firing a mixture of the main component feed with the subordinate component feed, and in which


the subordinate component feed comprises, based on the main component feed, a silicon oxide material in an amount of 50 to 200 ppm calculated as  $\text{SiO}_2$ , a calcium oxide material in an amount of 100 to 350 ppm calculated as  $\text{CaO}$ , a niobium oxide material in an amount of 50 to 250 ppm calculated as  $\text{Nb}_2\text{O}_5$ , a molybdenum oxide material in an amount of 100 to 400 ppm calculated as  $\text{MoO}_3$ , and a bismuth oxide material in an amount of 100 to 800 ppm calculated as  $\text{Bi}_2\text{O}_3$ , and

a ratio of  $\text{CaO}$  to  $\text{MoO}_3$  in the subordinate component feed is 0.6 to 1.6.

6. The ferrite core of any one of claims 1 to 5, which has permeability of at least 10,000 at 100 kHz, and at least 3,000 at 500 kHz.

7. A method for producing the ferrite core for line filters of any one of claims 1 to 6, in which a plurality of compacts are placed on a setter, and then fired.

FIG. 1

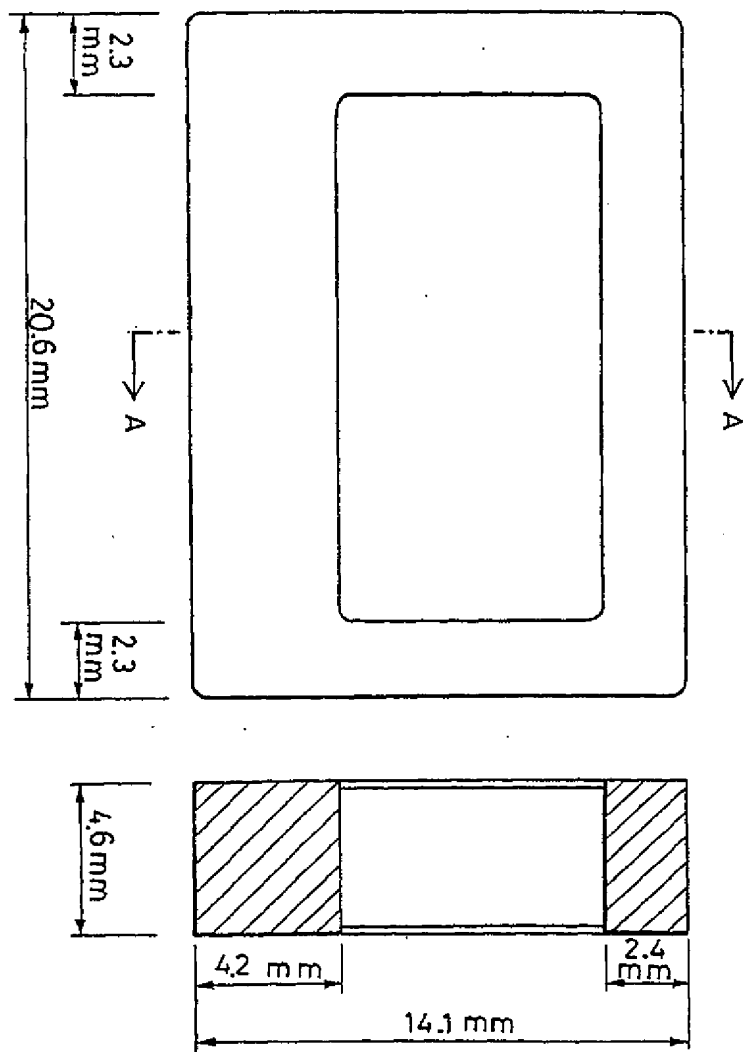



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 1999

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	EP 0 628 524 A (TDK CORP) 14 December 1994 * page 4, line 11 - line 15; claims 1,4; example 1 *	1,4,5	H01F17/04 H01F17/06 H01F1/34 C04B35/26
Y	--- JOURNAL OF MAGNETISM AND MAGNETIC MATERIALS, vol. 133, no. 1/03, 1 May 1994, pages 487-489, XP000443737 INABA H ET AL: "MAGNETIC PROPERTIES AND THE GRAIN BOUNDARY STRUCTURE OF MN-ZN FERRITES WITH THE ADDITION OF NB2O5" * the whole document *	1,4,5	
A,D	--- PATENT ABSTRACTS OF JAPAN vol. 017, no. 398 (E-1403), 26 July 1993 & JP 05 074623 A (TOKIN CORP), 26 March 1993, * abstract *		
A,D	--- PATENT ABSTRACTS OF JAPAN vol. 015, no. 179 (E-1064), 8 May 1991 & JP 03 041708 A (HITACHI FERRITE LTD), 22 February 1991, * abstract *		TECHNICAL FIELDS SEARCHED (Int.Cl.6)  H01F C04B
A	--- EP 0 551 907 A (MATSUSHITA ELECTRIC IND CO LTD) 21 July 1993 -----		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 May 1997	Examiner Decanniere, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 150 (04.92) (PouCh)